

For low voltage

For medium &
low voltage

For medium voltage

For medium &
high voltageFor extra high
voltage

For AC

For DC

For AC & DC

For communication

For railways

HST-20N

Medium voltage detector

AC 3k~25kV

DC 3k~25kV

Audio
signaling
and light
emitting


Waterproof

AC
DC

■ Features

- New model with reduced weight of HS-20N

■ Dimensions

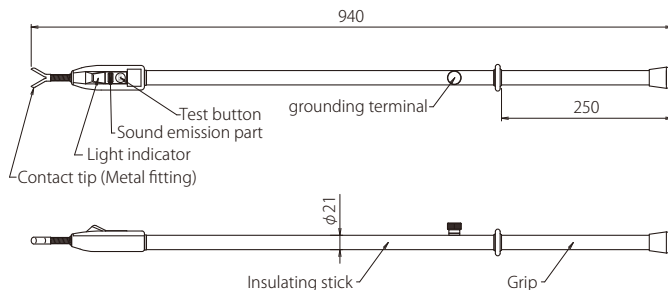

Voltage Detector of Dual Use for AC/DC



■ Accessory



Bag for housing



grounding wire
(7 m)

■ Specifications

Working voltage range	AC	3kV~25kV
	DC	
Operation starting voltage (Voltage to ground)	AC	1000V \pm 20%
	DC	
	Insulated wire	Unusable
Frequency	50/60Hz	
Dielectric strength	Between contact tip and grounding terminal, AC 50kV, 1 min	
Leakage current	0.5 mA or less at dielectric strength test	
Battery	LR44(1.5V) \times 2 pcs	
Battery life	About 4 hr. in a continuously operating state	
Operating temperature range	-10°C ~ +40°C	
Weight	About 610 g (main body only)	