

# HASEGAWA

## Non-contact Voltage Detector

# Type HWB-550A

This product is for AC current, and it indicates the presence of charge in circuits with an electronic buzzer that is easy to hear and a high-luminance light emitting diode. It is **light-weight** and **easy to handle**.

### FEATURES

- FRP is used for the **insulating stick**. It is of **light-weight** and has outstanding operability.




MADE IN JAPAN

### Rating and Specifications

Type	HWB-500A	
Working voltage range	AC 11kV ~ 550kV	
Indication	Sound	Intermittent sound 80dB or more
	Light	Stand-by state : Green LED light (Automatically turns off in about 2minutes) Operation state : Red LED flash light (Flashing red light, distinguishable in brightness of 50,000lux)
Frequency	50/60Hz	
Water proof	Equivalent to IP45	
Shock resistance	This device has Shock resistance by Pendulum method ( Pendulum method : IEC 61243-1 Shock resistance )	
Operating temperature range	-10°C ~ +50°C	
Battery	R03 (1.5V) × 2pcs.	
Weight	About 400 g (Include batteries)	
Accessory	Bag for housing	

### Dimensions

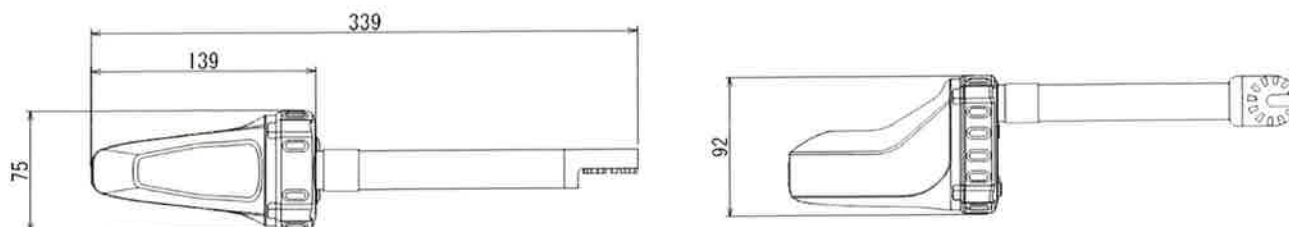

HASEGAWA ELECTRIC CO., LTD

<https://www.hasegawa-elec.co.jp> infor@hasegawa-elec.co.jp